


Technical Specifications

Model	FY-3208R	FY-3266R	FY-3206R
Printhead	Drop on demand Piezo Head		
Number of Printhead	8 SPT510-35PL	6 SPT1020	6 SPT510-35PL
Maximum Resolution	720X720DPI	720X720DPI	720X720DPI
Maximum Print Width	3200mm(125.98")		
Print Speed*	Draft	101m ² /hr	54m ² /hr
	Standard	76m ² /hr	44m ² /hr
	Quality	51m ² /hr	27m ² /hr
	High Quality	28m ² /hr	16m ² /hr
Media	Max. width	3,300mm	
	Type	Frontlit, Backlit, Vinyl, Polyester, Window Film, Leather...	
Heating System	3 way intelligent heater		
Ink	Type	Solvent , Eco Solvent	
	Capacity	1L or 5L per color Main Tank	
Auto Cleaning System	Positive Pressure Cleaning, LED lighting		
	Semi Auto-Capping		
Print Interface	USB 2.0		
RIP Software	Maintop, Ultraprint, Photoprint, ONYX		
Power Specification	Printer	AC 220V 50HZ 3.5A	770W
	Heater	AC 220V 50HZ 9A	1980W
	Drying	AC 220V 50HZ 10A	2200W
Operation Environment	Temperature	Working : 15°C-30°C (Recommend : 20°C-28°C)	
	Humidity	Working : 20%-80% (Recommend : 40%-60%)	
Dimension & Weight	Machine	L4600 x W905 x H1280mm	348kg
	Package	L4590 x W970 x H1550mm	591kg

* The speed data are taken from the printer at fast speed. Product specifications are subject to change without notice in advance; Computer and monitor not included; For more information, please contact your local dealer or visit www.fyunion.com; All rights reserved.

Features

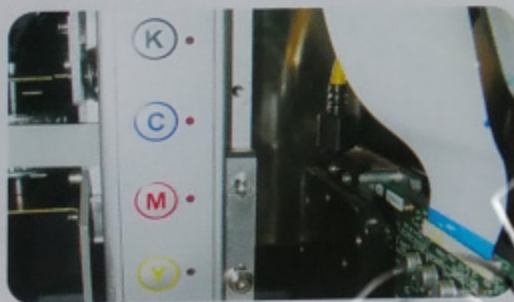

Individual color purging system minimizes waste of ink;



Industrial printhead with long life span and high production;



Carriage moving system: 8 sets of bearing plus 4 pieces of steel guide are utilized to move the carriage stably and steadily;



Platform and girder are made of perfect designed alloy aluminum, which ensures excellent mechanical movement and printing quality;



Computer, monitor and key board are mounted on printer for ease of operation;



Drying system: 19 cooling fans provide immediate dry of printing; Optional IR system;